


REV	DESCRIPTION	BY	DATE	CHK	ENG	REL DATE
-	REL. FOR PRODUCTION	-	-	-	-	2-17-95



SPECIFICATIONS MODEL: 01090-XXX-E000X

CAPACITY IN. LBS. \_\_\_\_\_ 100 TO 10,000  
 STD. OUTPUT mV/V NOM.@F.S. \_\_\_\_\_ 2.0  
 OPT.(H) OUTPUT mV/V NOM.@F.S. \_\_\_\_\_ 5.0  
 HYSTERESIS %F.S. \_\_\_\_\_ .10  
 NON-LINEARITY %F.S. \_\_\_\_\_ .10  
 COMPENSATED TEMP. RANGE °F \_\_\_\_\_ 70 TO 170  
 USEABLE TEMP. RANGE °F \_\_\_\_\_ -65 TO 250  
 BRIDGE RESISTANCE (NOM.) OHM \_\_\_\_\_ 350

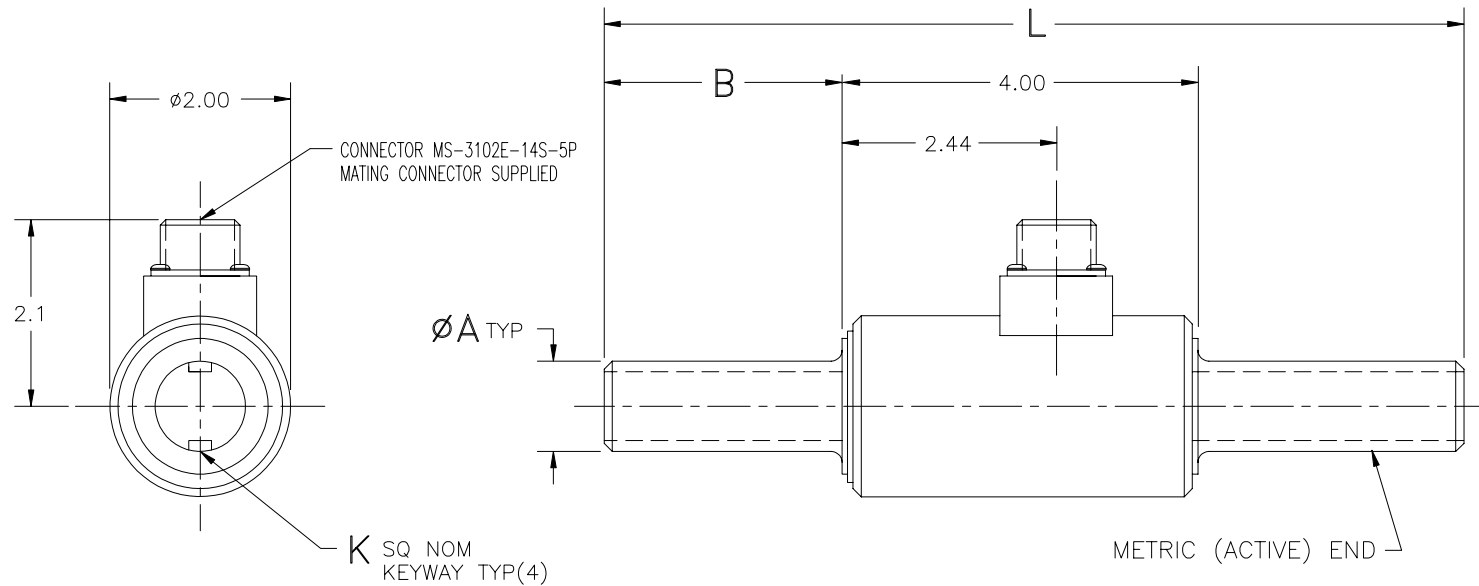

**Distributed by: Spare S.r.l.**  
 Via Carlo Spagnolo, 4 - 27057 Varzi - Pavia - Italy  
 tel. +39-0383-54.51.51 - fax: +39-0383-54.50.51  
 http://www.spare.it - http://www.spareonweb.com  
 e-mail: sales@spare.it

POLARITY: C.W. UPSCALE  
 ASSEMBLY DWG REF: 16517C0-\*  
 \*-INDICATES CURRENT REV

01090-014-E000X	10,000					
01090-053-E000X	5,000	1.500	9.50	2.75	3/8	
01090-023-E000X	2,000					
01090-013-E000X	1,000	1.000			1/4	
01090-052-E000X	500		8.50	2.25		
01090-022-E000X	200					3/16
01090-012-E000X	100	.750				
MODEL NO.	CAPACITY(IN LBS)	A <sup>+0.000</sup> <sub>-0.003</sub>	L	B	K	

PIN CODE	
PIN	FUNCTION
A	+ EXC.
B	+ SIG.
C	- SIG.
D	- EXC.

INSTALLATION		CHECKED BY	DS
MODEL: 01090-XXX-E000X		PROJ. ENG.	DS
FINISH	SCALE FULL	DRAWN BY	KKB
MATRL.		DATE	2-14-95
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES X.X ±.03 X.XX ±.01 X.XXX ±.005 ANG. ±.5'			
Sensor Developments Inc. 1050 W SILVER BELL RD ORION, MI 48359		DRAWING NUMBER 16516C0-0	